



PLAN

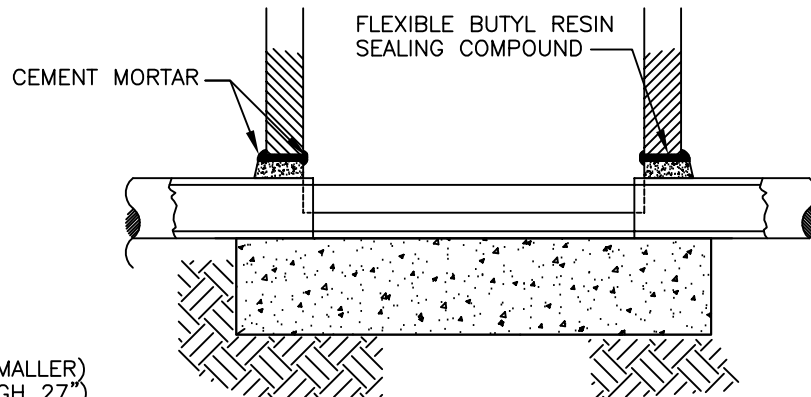

SECTION B-B

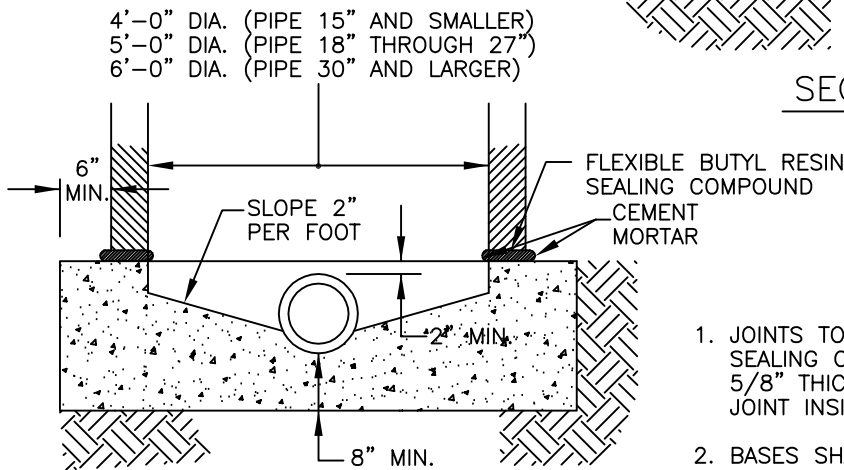

SECTION A-A

### NOTES:

1. JOINTS TO BE SET IN FLEXIBLE BUTYL RESIN SEALING COMPOUND AND GROUTED WITH MORTAR 5/8" THICK AND EXTENDING 4" EACH SIDE OF JOINT INSIDE AND OUTSIDE.
2. BASES SHALL BE REINFORCED WHEN THE DISTANCE FROM INVERT TO TOP OF COVER WILL EXCEED 15 FT. REINFORCING TO BE APPROVED BY CITY ENGINEER.
3. SQUARE BASES ARE ACCEPTABLE.



**CITY of DELTA**  
360 MAIN STREET  
DELTA, CO 81416

### STANDARD MANHOLE BASE

DATE: DEC. 1998

SHEET SS1 OF 10